

The OBIGINAL Self-Dumping Hopper



Introduction



STANDARD HOPPER

Durable Hopper L W Model # Size H LH Fork Opening Weight Capacity 1T-12-SL-1/3 1/3 CU YD 48" 39 1/2" 24" 24" 2 1/2 x 28 3/4" 270 LBS 2000 LBS • 2000 - 4000 LBS Capacity • 12 & 10 Gauge Carbon Steel body 1T-12-SL-1/2 1/2 CU YD 47" 51 1/2" 24" 24" 2 1/2 x 28 3/4" 324 LBS 2000 LBS • Flip secure latch 1T-12-034 39" 17 1/2" 17 1/2" 2 1/2 x 28 3/4" 2000 LBS 1/8 CU YD 36" 192 LBS • 100% continuous weld 1T-12-068 1/4 CU YD 39" 32" 25 1/2" 25" 2 1/2 x 21" 218 LBS 2000 LBS • 5/16" form rocker angle for superior strength 1T-12-105 1/3 CU YD 49 1/2" 31" 31 1/2" 28 1/2" 2 1/2 x 21" **264 LBS** 2000 LBS • Extruded tracking base hole for outstanding 1T-12-135 1/2 CU YD 39 1/2" 31 1/2" 28 1/2" 2 1/2 x 28 3/4" 293 LBS 2000 LBS tracking 60 1/2" 39 1/2" 36" 32 1/2" 2 1/2 x 28 3/4" 1T-12-205 3/4 CU YD 362 LBS 2000 LBS Our Light Duty line of self-dumping 2T-10-270 1 CU YD 64 1/2" 39 1/2" 35" 4000 LBS 37 1/2" 2 1/2 x 28 3/4" 465 LBS hoppers can handle loads from 2,000 - 4,000lbs 2T-10-405 64 1/2" 57 1/2" 2 1/2 x 28 3/4" 1 1/2 CU YD 37 1/2" 35" 563 LBS 4000 LBS capacity. The Durable hopper is used for light 2T-10-410 1 1/2 CU YD 64 1/2" 44 1/2" 45" 35" 2 1/2 x 28 3/4" 4000 LBS 556 LBS weight material applications. 35" 2T-10-540 2 CU YD 64 1/2" 58 1/2" 45" 2 1/2 x 28 3/4" 619 LBS 4000 LBS 2T-10-550 2 CU YD 64 1/2" 58 1/2" 45" 35" 2 1/2 x 47" 691 LBS 4000 LBS 2T-10-675 2 1/2 CU YD 64 1/2" 75" 45" 35" 2 1/2 x 28 3/4" 672 LBS 4000 LBS 37" 2T-10-680 2 1/2 CU YD 71" 58" 2 1/2 x 28 3/4" 843 LBS 58 1/2" 4000 LBS 2T-10-810 3 CU YD 71" 63" 37" 58" 2 1/2 x 28 3/4" 916 LBS 4000 LBS 2T-10-1080 4 CU YD 71" 83 1/2" 58" 37" 2 1/2 X 37 1/2" 1062 LBS 4000 LBS 37" 2T-10-1500 71" 58" 1148 LBS 5 CU YD 97 1/2" 2 1/2 X 47" 4000 LBS

Rugged Hopper	Model #	Size	L	W	Н	LH	Fork Opening	Weight	Capacity
• 4000 – 8000 LBS Capacity	2T-3/16-SL-1/3	1/3 CU YD	48"	39 1/2"	24"	24"	2 1/2 x 28 3/4"	352 LBS	4000 LBS
• 7 Gauge Carbon Steel body	2T-3/16-SL-1/2	1/2 CU YD	48"	52"	24"	24"	2 1/2 x 28 3/4"	407 LBS	4000 LBS
• Flip secure latch	2T-3/16-034	1/8 CU YD	36"	39"	17 1/2"	17 1/2"	2 1/2 x 28 3/4"	242 LBS	4000 LBS
• 100% continuous weld	2T-3/16-068	1/4 CU YD	39"	32"	25 1/2"	25"	2 1/2 x 21"	284 LBS	4000 LBS
 5/16" form rocker angle for superior strength Extruded tracking base hole for outstanding 	2T-3/16-105	1/3 CU YD	49 1/2"	32"	31"	28 1/2"	2 1/2 x 21"	352 LBS	4000 LBS
tracking base note for outstanding tracking	2T-3/16-135	1/2 CU YD	49"	39 1/2"	31 1/2"	28 1/2"	2 1/2 x 28 3/4"	395 LBS	4000 LBS
· ·	3T-3/16-205	3/4 CU YD	61"	39 1/2"	36"	32 1/2"	2 1/2 x 28 3/4"	558 LBS	6000 LBS
Our Medium Duty line of self-dumpin	3T-3/16-270	1 CU YD	65"	39 1/2"	37 1/2"	35"	2 1/2 x 28 3/4"	583 LBS	6000 LBS
hoppers can handle loads from 4,000 - 8,000lbs	3T-3/16-405	1 1/2 CU YD	65"	58"	38 1/2"	35"	2 1/2 x 28 3/4"	710 LBS	6000 LBS
capacity. The Rugged hopper is the most widely used hopper in the material handling industry.	3T-3/16-410	1 1/2 CU YD	65"	45 1/2"	46 1/4"	35"	2 1/2 x 28 3/4"	698 LBS	6000 LBS
used nopper in the material handling medistry.	3T-3/16-540	2 CU YD	65"	58 1/2"	46 1/4"	35"	2 1/2 x 28 3/4"	773 LBS	6000 LBS
	3T-3/16-550	2 CU YD	65"	58 1/2"	46 1/4"	35"	2 1/2 x 47"	840 LBS	6000 LBS
	3T-3/16-675	2 1/2 CU YD	65"	75"	46 1/4"	35"	2 1/2 x 28 3/4"	888 LBS	6000 LBS
The state of the s	3T-3/16-680	2 1/2 CU YD	71"	58 1/2"	58 1/2"	37"	2 1/2 x 28 3/4"	1020 LBS	6000 LBS
	3T-3/16-810	3 CU YD	71"	63 1/2"	58 1/2"	37"	2 1/2 x 28 3/4"	1098 LBS	6000 LBS
	3T-3/16-1080	4 CU YD	71"	83 1/2"	58 1/2"	37"	2 1/2 X 37 1/2"	1287 LBS	6000 LBS
	3T-3/16-1500	5 CU YD	71"	97 1/2"	58 1/2"	37"	2 1/2 X 47"	1426 LBS	6000 LBS
	4T-3/16-810	3 CU YD	71"	63 1/2"	61"	39 1/2"	2 1/2 x 28 3/4"	1215 LBS	8000 LBS
	4T-3/16-1080	4 CU YD	71"	83 1/2"	61"	39 1/2"	2 1/2 X 37 1/2"	1412 LBS	8000 LBS
	4T-3/16-1500	5 CU YD	71"	97 1/2"	61"	39 1/2"	2 1/2 X 47"	1559 LBS	8000 LBS

STANDARD HOPPER

• 8000 – 10,000 LBS Capacity • 1/4" Gauge Carbon Steel body • 5/16" constructed bases • Flip secure latch

- 5/16" form rocker angle for superior strengthExtruded tracking base hole for outstanding
- Extruded tracking base hole for outstanding tracking
- Interior corner angle supports
- Base to body chains and continuous stop bar

Our Heavy Duty line of self-dumping hoppers can handle loads from 8,000 – 10,000 lbs capacity. The Ultimate hopper is the strongest self-dumping hopper in the material handling industry. These hoppers are constructed for the most extreme material handling applications.

Model #	Size	L	W	Н	Weight	Capacity
4T-1/4-135	1/2 CU YD	48 1/2"	40"	31 1/2"	625 LBS	8000 LBS
4T-1/4-205	3/4 CU YD	60 1/2"	40"	36"	740 LBS	8000 LBS
4T-1/4-270	1 CU YD	64 1/2"	39 1/2"	38 1/2"	925 LBS	8000 LBS
4T-1/4-405	1 1/2 CU YD	64 1/2"	57 1/2"	38 1/2"	1000 LBS	8000 LBS
4T-1/4-410	1 1/2 CU YD	64 1/2"	44 1/2"	46 1/2"	1040 LBS	8000 LBS
4T-1/4-540	2 CU YD	64 1/2"	57 1/2"	46 1/2"	1140 LBS	8000 LBS
4T-1/4-675	2 1/2 CU YD	64 1/2"	74"	46 1/2"	1298 LBS	8000 LBS
4T-1/4-680	2 1/2 CU YD	71"	57 1/2"	58"	1320 LBS	8000 LBS
5T-1/46-810	3 CU YD	71"	63 1/2"	61"	1542 LBS	10,000 LBS
5T-1/4-1080	4 CU YD	71"	83 1/2"	61"	1875 LBS	10,000 LBS
5T-1/4-1500	5 CU YD	71"	97"	61"	2035 LBS	10,000 LBS





• 8000 – 10,000 LBS Capacity 4T-3/16-EL-1620 6 CU YD 91" 83" 70" 2050 LBS 8000 LBS • 6 – 10 yard volume capacity 4T-3/16-EL-1890 7 CU YD 91" 96" 70" 2225 LBS 8000 LBS • 1/4" Gauge Carbon Steel body 4T-3/16-EL-2160 8 CU YD 91" 109" 70" 2340 LBS 8000 LBS • 5/16" box tube constructed bases 5T-1/4-EL-2430 9 CU YD 91" 122" 70" 2750 LBS 10,000 LBS • Slide bolt latch 5T-1/4-EL-2700 10 CU YD 91" 135" 70" 2900 LBS 10,000 LBS	Behemoth Hopper	Model #	Size	L	W	Н	Weight	Capacity
• 5/16" form rocker angle for superior strength • Extruded tracking base hole for outstanding tracking • Interior corner angle supports • Base to body chains and continuous stop bar Our Large Volume (6 yard - 10 yard) line of self-dumping hoppers can handle loads from 8,000 – 10,000 lbs. capacity. The Behemoth hopper is designed to handle large volume material handling applications.	 8000 – 10,000 LBS Capacity 6 – 10 yard volume capacity 1/4" Gauge Carbon Steel body 5/16" box tube constructed bases Flip secure latch Slide bolt latch 5/16" form rocker angle for superior strength Extruded tracking base hole for outstanding tracking Interior corner angle supports Base to body chains and continuous stop bar Our Large Volume (6 yard - 10 yard) line of self-dumping hoppers can handle loads from 8,000 – 10,000 lbs. capacity. The Behemoth hopper is designed to handle large volume 	4T-3/16-EL-1620 4T-3/16-EL-1890 4T-3/16-EL-2160 5T-1/4-EL-2430	6 CU YD 7 CU YD 8 CU YD 9 CU YD	91" 91" 91" 91"	83" 96" 109" 122"	70" 70" 70" 70"	2050 LBS 2225 LBS 2340 LBS 2750 LBS	8000 LBS 8000 LBS 8000 LBS 10,000 LBS 10,000 LBS

STANDARD HOPPER

Plastic Lid Hopper Model # Size L W Η Weight Capacity Roura's plastic lid hopper models provide Type A Plastic Lid a safe and efficient method of keeping the H-PLDA-135 1/2 YD 4,000 LBS 57" 34 1/2" 36 1/2" 441 LBS material in the hopper dry. Its unique design H-PLDA-205 3/4 YD 57" 46 1/2" 36 1/2" 553 LBS 6,000 LBS ensures a light weight cover that is easy to use. H-PLDA-270 57" 1 YD 58 1/2" 36 1/2" 646 LBS 6,000 LBS Our exclusive drip channel is designed to help H-PLDA-410 1 1/2 YD 65" 47" 49" 779 LBS 6,000 LBS eliminate liquid from reaching the material H-PLDA-540 2 YD 65" 60" 49" 864 LBS 6,000 LBS inside the hopper during operation. 65" 49" H-PLDA-675 2 1/2 YD 76 1/2" 975 LBS 6,000 LBS Model # Size L \mathbf{W} Η Weight Capacity Type B Plastic Lid H-PLDB-135 1/2 YD 57" 34 1/2" 36 1/2" 467 LBS 4,000 LBS H-PLDB-205 3/4 YD 57" 46 1/2" 36 1/2" 589 LBS 6,000 LBS 57" H-PLDB-270 1 YD 58 1/2" 694 LBS 6,000 LBS 36 1/2" 47" 65" 49" H-PLDB-410 1 1/2 YD 815 LBS 6,000 LBS H-PLDB-540 2 YD 65" 60" 49" 911 LBS 6,000 LBS H-PLDB-675 2 1/2 YD 65" 76 1/2" 49" 1036 LBS 6,000 LBS H-PLDA-675 H-PLDA-270 H-PLDB-675

H-PLDB-540 (Inlet option shown)

60"

60"

36"

72"

Size

1 CU YD

2 CU YD

Size

1/3 CU YD

1/2 CU YD

Model #

RRH 36

RRH 72

Model #

OS 24

OS 38

Refuse/Recycling Hopper

- 2000 LBS Capacity
- 12 Gauge Carbon Steel body
- Flip secure latch
- Double walled plastic lid
- 5/16" form rocker angle for superior strength
- Extruded tracking base hole for outstanding tracking

Our Refuse/Recycling line of self-dumping hoppers can handle loads of 2000 lbs. capacity. The perfect hopper for the recycling & refuse material handling applications.





W

72"

54"

53"

64 1/2"

Η

31 1/2"

46 1/2"

Weight

640 LBS

881 LBS

Capacity

4000 LBS

6000 LBS

Η

61"

61"

Weight

540 LBS

825 LBS

Capacity

2000 LBS

2000 LBS

Openside Hopper

- 4000-6000 LBS Capacity
- 7 Gauge Carbon Steel body
- Flip secure latch
- 5/16" form rocker angle for superior strength
- Extruded tracking base hole for outstanding tracking

Our Openside line of self-dumping hoppers can handle loads from 4000-6000 lbs. capacity. The perfect hopper for the lumber, extrusions, pipe and long length material handling applications.





90° Dump Hopper	Model #	Size	L	W	Н	Capacity
• 1000 - 2000 LBS Capacity	90-10-068	1/4 CU YD	40"	48 1/2"	13"	1000 LBS
• 7 & 10 Gauge Carbon Steel body	90-10-135	1/2 CU YD	45 3/4"	48 1/2"	22 3/8"	1000 LBS
• Flip secure latch	90-3/16-068	1/4 CU YD	40 1/8"	48 5/8"	13"	2000 LBS
Mast secure chain with grab hook	90-3/16-135	1/2 CU YD	46"	49 1/8"	22 3/8"	2000 LBS

Our 90° Dump line of self-dumping hoppers can handle loads from 1000 - 2000 lbs. capacity. The perfect hopper for the metal chips, shavings, turnings and saw dust material handling applications.





De-watering Hopper	Model #	Size	L	W	Н	Weight	Capacity
• 6000 LBS Capacity	DW-270	1 Cu Yd	64 1/2"	39 1/2"	38 1/2"	730	6000 LBS
1/4" Gauge Carbon Steel bodyFlip secure latch	DW-405 DW-410	1 1/2 Cu Yd 1 1/2 Cu Yd	64 1/2" 64 1/2"	57 1/2" 44 1/2"	38 1/2" 46 1/2"	835 865	6000 LBS 6000 LBS
5/16" form rocker angle for superior strengthExtruded tracking base hole for outstanding	DW-540	2 Cu Yd	64 1/2"	57 1/2"	46 1/2"	960	6000 LBS
tracking	DW-675 DW-810	2 1/2 Cu Yd 3 Cu Yd	64 1/2" 71"	75 1/2" 63 1/2"	46 1/2" 58 1/2"	1210 1390	6000 LBS 6000 LBS

Our De-Watering line of self-dumping hoppers can handle loads of 6000 lbs. capacity. The perfect hopper for the pulp, aggregate and waste/water treatment material handling applications.





• 6000 – 10,000 LBS Capacity

- 3/8" liner & 1/4" perforated walls made of Carbon Steel
- Flip secure latch

Dross Hopper

• Extra heavy-duty base for superior strength

Our Dross line of self-dumping hoppers can handle loads from 6000-10,000 lbs. capacity. The perfect hopper for the HIGH HEAT material handling applications. This product is used in the collection of hot material applications as hot forgings, molten dross and hot glass.

Model #	Size	L	W	Н	Capacity
DRS-375-135	1/2 Cu Yd	49"	39 1/2"	31 1/2"	6,000 LBS
DRS-375-270	1 Cu Yd	64 1/2"	39 1/2"	41"	10,000 LBS
DRS-375-405	1 1/2 Cu Yd	64 1/2"	57 1/2"	41"	10,000 LBS
DRS-375-410	1 1/2 Cu Yd	64 1/2"	44 1/2"	49"	10,000 LBS
DRS-375-540	2 Cu Yd	64 1/2"	57 1/2"	49 1/2"	10,000 LBS






Skeleton Hopper

- Exclusive pierced and extruded trunnion track with taper pins for outstanding wear resistance
- All hopper bodies are constructed of 3/16 thick carbon steel
- One piece gusset frame for superior strength

The Skeleton Hopper is engineered for sheet metal processing equipment as Plasma, Laser and Turret Punching machining centers. This hopper will safely handle the daily transport and dumping of the scrap material produced from these machining operations.

Model #	Volume	L	W	Н	Weight	Fork Opening	Capacity
SKL-OS SKL-OS-WS						2 1/2" X 37 1/2" 2 1/2" X 37 1/2"	6000 LBS 6000 LBS

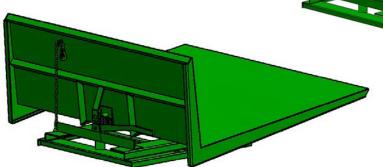

Stainless Steel Hopper

- 304 Stainless steel body
- Galvanize hot dip or 304 Stainless steel base
- Flip secure latch
- 5/16" form rocker angle for superior strength
- Extruded tracking base hole for outstanding tracking

Our Stainless Steel self-dumping hopper can be constructed to any of our standard product sizes or custom built to fit most material handling application. This product has a special appeal in the chemical, food and beverage industry.



CUSTOM HOPPER

Custom Hopper

- Solid Model cad design
- Over 100 years in business building material handling products

Roura Material Handling specializes in custom self-dumping hoppers and will modify an existing hopper design or custom engineer a hopper to meet any special application. Contact our engineering and sales staff at either plant to discuss your specific requirements.





Custom Painted Hopper







Rail Cart Hopper





BOTTOM DROP BOX

Bottom Drop Box Model # W Size Н Open Height Weight Capacity 49" 43" BDB-540 2 CU YD 66" 60" 1087 LBS 6000 LBS Roura Material Handling's Bottom Drop Box (BDB) container is a safe and efficient way of handling your scrap, waste and every day materials. This container discharges the material from the bottom of the box by way of swing doors. **FEATURES** • Empties the content inside of your container from the bottom of the box • Roura's exclusive retractable release system • Up to 6000 LBS load capacity 43"


GAYLORD ROTATOR


Gaylord Rotator


- Empties the content inside of your cardboard corrugated (Gaylord) boxes
- Wide range of flexibility in corrugated box sizes with our exclusive adjustable containing arms
- Preserves the longevity of your corrugated cardboard boxes with this safe and efficient material handling process

Roura Material Handling has a rotating container to help in the process of empting the content inside of your cardboard corrugated (Gaylord) boxes. Roura's Gaylord Rotator (RGR) container is a safe and efficient way of operating these common recycling methods. The models offered provide a wide range of flexibility in corrugated box sizes with our exclusive adjustable containing arms. Simply insert your cardboard corrugated recycling box inside the RGR container, lift the Roura RGR container with a forklift truck with rotating forks and proceed to dump the content inside the Gaylord box safe and efficiently. The RGR will also help preserve the longevity of your corrugated cardboard boxes with this safe and efficient material handling process.

Model #	Size	L	W	Н	Capacity	
RGR4871-7G	51"	50 1/2"	47"	71 1/2"	890	
RGR4871-10G	51"	50 1/2"	47"	71 1/2"	705	

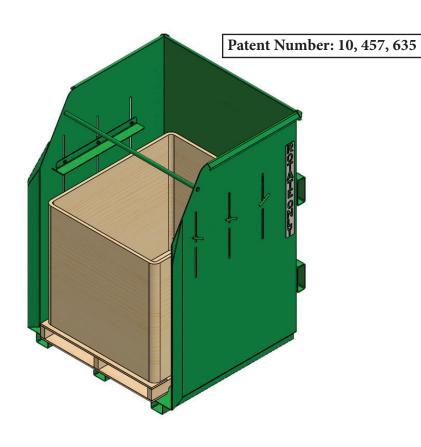

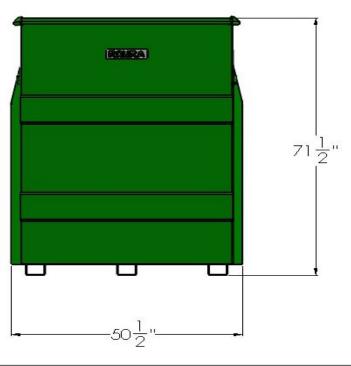



DRUM ROTATOR

Drum Rotator

Roura Material Handling has a rotating container to help in the process of empting the content inside of a 55- gallon drum. Roura's Drum Rotator (RDR) container is a safe and efficient way of operating these common recycling methods. The model provides a wide range of flexibility with our exclusive adjustable containing arms. Simply insert your 55-gallon drum into the RDR


CC	Λ 7	T	D	CC
$\Gamma\Gamma$	ΑΙ	· U	IX.	Γ_{i}


and efficiently.

• Empty the content inside of your 55-gallon drum


container, lift the Roura RDR container with a forklift truck with rotating forks and proceed to dump the content inside the 55-gallon drum safe

• Wide range of flexibility with our exclusive adjustable containing arms



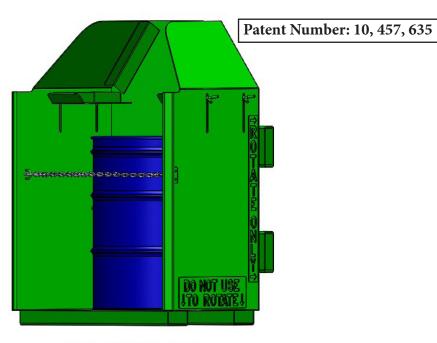

DRUM NOT INCLUDED

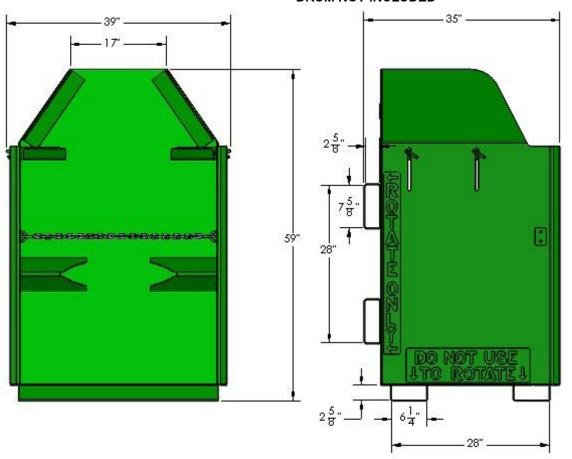

Introduction

Roura's standard line of Rotator Boxes are designed for the collection of bulk and scrap materials. The standard model is made of watertight, all welded carbon steel with drain plug and 2 way entry. This product line requires a forklift equipped with a fork rotating attachment.



Ultimate Rotator Box with Cover







Rugged Rotator Box with Lid





Stacked Rotator Box

ROTATOR BOXES

Durable Rotator Box

- 12 Gauge Steel bottom with Drain and Plug,
 12 Gauge Steel formed sides. Box Tube Fork
 Openings for Superior Strength with Skid Plates
- 2000 Lbs. Max Load Capacity
- 4-Way Entry
- Stackable (3 Empty Boxes High Recommended)
- Bright Safety Green Enamel Paint (Optional Colors Available)
- Options: Steel Hinged Cover, Steel Removable Cover, Casters, Crane Eyes, Tarps

The Durable Rotator Box is designed for the collection and storage of bulk and scrap material. This box can be dumped using a forklift equipped with a rotational fork attachment. The standard model is made of all welded carbon steel with drain plug and 4-way fork entry.

Model #	Size	L	W	H	Weight	Capacity
RTB-DUR-135	1/2 CU YD	47"	47"	17 1/4"	236 LBS	2000 LBS
RTB-DUR-205	3/4 CU YD	47"	47"	22 1/4"	265 LBS	2000 LBS
RTB-DUR-205	1 CU YD	47"	47"	28 1/4"	295 LBS	2000 LBS
RTB-DUR-405	1 1/2 CU YD	47"	47"	40 1/4"	355 LBS	2000 LBS
RTB-DUR-540	2 CU YD	47"	47"	52 1/4"	415 LBS	2000 LBS

Rugged Rotator Box

- 10 Gauge Steel bottom with Drain and Plug,
 10 Gauge Steel formed sides. Box Tube Fork
 Openings for Superior Strength with Skid Plates
- 4000 Lbs. Max Load Capacity
- 4-Way Entry
- Stackable (3 Empty Boxes High Recommended)
- Bright Safety Green Enamel Paint (Optional Colors Available)
- Options: Steel Hinged Cover, Steel Removable Cover, Casters, Crane Eyes, Tarps

The Rugged Rotator Box is designed for the collection and storage of bulk and scrap material. This box can be dumped using a forklift equipped with a rotational fork attachment. The standard model is made of all welded carbon steel with drain plug and 4-way fork entry.

Model #	Size	L	W	Н	Weight	Capacity	
RTB-RUG-135	1/2 CU YD	47"	47"	17 1/4"	280 LBS	4000 LBS	
RTB-RUG-205	3/4 CU YD	47"	47"	22 1/4"	312 LBS	4000 LBS	
RTB-RUG-270	1 CU YD	47"	47"	28 1/4"	350 LBS	4000 LBS	
RTB-RUG-405	1 1/2 CU YD	47"	47"	40 1/4"	430 LBS	4000 LBS	
RTB-RUG-540	2 CU YD	47"	47"	52 1/4"	505 LBS	4000 LBS	

Ultimate Rotator Box

- 7 Gauge Steel bottom with drain & plug
- 7 Gauge Steel formed sides
- Box tube fork openings for superior strength with skid plates
- 6,500 Lbs. Max load capacity
- 2-way entry
- Stackable (3 empty boxes high recommended)
- Bright safety Green paint (optional colors available)

ULTIMATE Rotator Boxes are available with a 6,500 lbs. capacity.

The Ultimate Rotator Box is designed for the collection and storage of bulk material. The 6,500 lbs. capacity box can be dumped with a rotating fork attachment. Roura's Rugged Rotator Boxes are available from 1/2 cubic yard to 3 cubic yards to solve all bulk material handling requirements. As with all Roura products, the Rugged Rotator Box offers the strongest standard rotating box in its class. This rotating box will reduce operation cost, increase productivity and provide a safe method of material handling.

Model #	Size	L	W	Н	Weight	Capacity
RTB-ULT-135	1/2 CU YD	39"	38 1/2"	27"	360 LBS	6500 LBS
RTB-ULT-270	1 CU YD	47"	47"	27"	460 LBS	6500 LBS
RTB-ULT-275	1 CU YD	39"	39"	39"	450 LBS	6500 LBS
RTB-ULT-405	1 1/2 CU YD	47"	47"	39"	565 LBS	6500 LBS
RTB-ULT-540	2 CU YD	47"	47"	51"	705 LBS	6500 LBS
RTB-ULT-680	2 1/2 CU YD	47"	59 1/2"	51"	850 LBS	6500 LBS
RTB-ULT-810	3 CU YD	47"	71"	51"	945 LBS	6500 LBS
RTB-ULT-815	3 CU YD	63 1/2"	63 1/2"	45"	1085 LBS	6500 LBS



ROTATOR BOXES

Rotator Box (Plastic Lid Optional)

- 4000 LBS. Capacity
- 10 Gauge Carbon Steel body
- 100% continuous weld
- Ø 1" drain hole with plug
- Stackable when empty (3 high max)

Our Medium Duty line of Rotator Boxes can handle loads of 4000 lbs. capacity. The Rugged Rotator Box is designed for the collection and storage of medium weight material applications. This product is best used with a forklift truck equipped with fork rotating attachment.

Mo	del #	Size	L	W	Н	Weight	Capacity
RRB	-10-135	1/2 CU YD	37 1/2"	36 3/4"	23 1/2"	224 LBS	4000 LBS
RRB	-10-205	3/4 CU YD	37 1/2"	36 3/4"	33 3/8"	280 LBS	4000 LBS
RRB	-10-270	1 CU YD	37 1/2"	46"	36 3/8"	320 LBS	4000 LBS
RRB	-10-405	1 1/2 CU YD	37"	57"	41 3/8"	389 LBS	4000 LBS
RRB	-10-540	2 CU YD	37"	57"	51 3/8"	455 LBS	4000 LBS





Custom Rotator Box

- Solid Model cad design
- Over 100 years in business building material handling products

Roura Material Handling specializes in custom Rotator boxes and will modify an existing box design or custom engineer a box to meet any special application. Contact our engineering and sales staff at either plant to discuss your specific requirements.



ROTATOR BOXES

Chip Tub Rotator	Model #	Size	L	W	Н	Weight	Capacity	
 4000 LBS. Capacity 10 Gauge Carbon Steel body 100% continuous weld Ø 1" drain hole with plug 2-way fork entry The Chip Tub rotator is designed for the collection and storage of bulk and scrap material. This box can be dumped using a forklift equipped with a rotational fork attachment. The standard model is made of all welded carbon steel with drain plug and 2-way fork entry. 	RTB-CT-135 RTB-CT-205 RTB-CT-270 RTB-CT-405	1/2 CU YD 3/4 CU YD 1 CU YD 1 1/2 CU YD	48" 50 1/2" 56 1/2" 59 1/4"	33 1/2" 36" 39 1/2" 45 1/2"	36" 38" 43" 46 1/2"	282 LBS 299 LBS 370 LBS 435 LBS	4000 LBS 4000 LBS 4000 LBS 4000 LBS	
RTB-CT-135		301/4 - 301/2 - 301/2 - 36	21 1/2"	ULL HANDLE	7½ FORK	31/2" 30° OPENING	29)	_
RTB-CT-205		32 \$ 33-	4	6" X 2" CASTE	71/2	47 4 1 3 1 1 5 1 5 1 5 1 5 1 5 1 5 1 5 1 5 1	34"	
RTB-CT-270		39½ 	29-	6° X 2° CASTERS—	7½- FC	- 56½" - 5058" - 316" 30° ORK OPENING	37 2	_
RTB-CT-405		451/2 423/16 MSID	,	USH PULL HANDLE 34 46 1. INSIDE	- 22	59 4"	42 1/2	

RELEASE SYSTEMS

Mechanical Hopper Release

- Coated wire cable
- Quick disconnect snap hook clasp
- Left or Right hand release point

Roura's Mechanical Hopper Release system is design for the operator to effectively transport and dump the material while remaining seated on the forklift truck. The Roura MHR system is a revolutionary new solution to safely collect, transport and dump bulk material and waste.

Part # Size (Fits Model S) - Durable, Rugged or Ultimate Hoppers

MHR-21 105 (1/3 Yd) & RRH-36

MHR-30 034 - 675 & RRH - 72

MHR-36 680 & 810

MHR-44 1080

MHR-56 1500





Pull Down Handle Release

- Coated wire cable
- Quick disconnect snap hook clasp
- Left or Right hand release point

This option is the perfect application used when the hopper is at an elevated dumping height. Simply pull the steel coated cable system while standing on the ground to dump loads at elevated heights. The cable system is stored on the back of the hopper, providing a safe environment while the hopper is in its filled operation.



PRODUCT OPTIONS

Casters

Roura provides caster and wheel sets in a variety of combinations to fit your specific needs. A complete set includes two swivel rear casters and two rigid front casters. All swivel wheels shown are mounted on kingpinless swivel rigs. The following information will allow you to choose the right type, size, and rig combination.

Ductile Iron Wheel (Size 8" x 2") Our most popular caster. For use on rough floors with metal chips and debris. Easy rolling, crowned wheel face for easy turning. Available on models up through 680 and capacities up to 5000#. Semisteel is substituted for ductile iron for sizes 4"x 6" x 2" and 10" x 3". 10 inch wheels are capable of withstanding 8000# loads per set.

Polyurethane Wheel (Sizes 4"x 2", 6" x2", 8" x 2", and 10" x 3") A quiet rolling wheel with molded on polyurethane tread on a steel core. Non-marking, resists oil, water, grease, and most solvents. Available on models up through 680 and capacities up to 4800# for 8" wheels and 800# for 10" wheels.

Phenolic Wheel (Sizes 4" x 2", 6" x 2", and 8" x 2") An easy rolling wheel, quieter than steel, non-marking and sparkproof. Resistant to oil water and grease. Excellent floor protection and can be used on smooth or rough floors. Available on models up through 680 and capacities up to 4000# per set.

Туре	Size	Part#	Description
PHENOLIC	4 X 2	CAS-04-PH-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
POLYURETHANE	4 X 2	CAS-04-PY-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
SEMI-STEEL	4 X 2	CAS-04-SS-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
PHENOLIC	6 X 2	CAS-06-PH-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
POLYURETHANE	6 X 2	CAS-06-PY-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
SEMI-STEEL	6 X 2	CAS-06-SS-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
DUCTILE IRON	8 X 2	CAS-08-DI-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
PHENOLIC	8 X 2	CAS-08-PH-C	COMPLETE SET - 2 FIXED & 2 SWIVEL
POLYURETHANE	8 X 2	CAS-08-PY-C	COMPLETE SET - 2 FIXED & 2 SWIVEL





Ductile Iron Caster





PRODUCT OPTIONS

Steel Covers

Please specify cover type when ordering.

Watertight cover

Formed 14 GA. front and rear cover, with a continuous hinge across the top of the covers. Drain channel under hinge. (Models 680 and up have 12 GA, covers) ¼" neoprene gasket attached to bottom of cover. Cover watertight. (1) chest handle on each cover, hopper to have (1) D-ring, chain and snap hook onto chest handle to hold cover open when dumping. Part number COV-WT + hopper model number.



Type B Cover Center hinge, fixed back. Available on all models, not recommended on models 680 and above.



Type D Cover Double hinge cover- open nose and rear- fixed center. Most often used on models 680-1500



Type A Cover Center hinge, open front and back. Available on all models, not recommended on models 680 and above.

Tarp Covers

Two types of covers: Mesh and Vinyl

Vinyl Tarp

Waterproof, helps to comply with rainwater runoff environment regulations. Part numbers: TPV + hopper model number

Mesh Tarp

Prevents material from falling out of hopper during transport. Part numbers: TPM + hopper model number.

Both have fitted fronts with bungee cord fasteners in back.






Mesh Tarp Cover

Ultimate Rotator Box Cover

Optional Parts

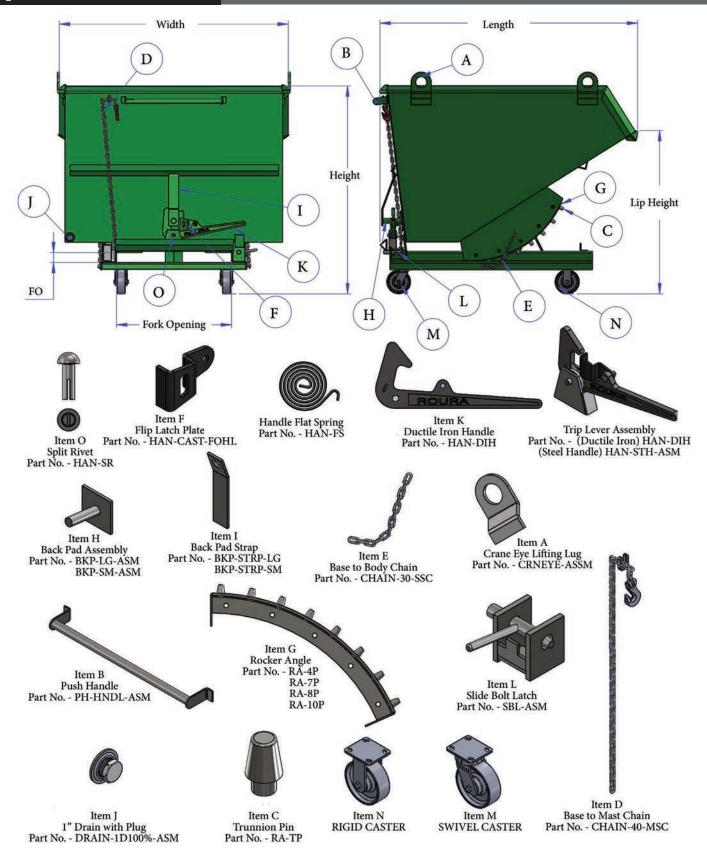

Stacking

Stacking of filled hoppers is not recommended. Stacking of empty hoppers should not be more than 3 high. Stacking feature must be ordered.

Load Capacity

Check Load Capacity of fork lift truck when ordering large or heavy duty hoppers.

Self-Dumping hoppers are designed to be dumped only when picked up by a fork lift truck. Hoppers should never be dumped while sitting on the ground or while on a pallet or platform trucks. Hoppers are designed to dump when fully loaded, with forks tilted back slightly from parallel to the ground.

Colors

Standard color is Roura green enamel paint. Other enamel colors or primers are available at additional cost. Custom enamel paint colors are also available. We can match any color if the customer provides a paint chip sample or RAL number.

Casters

For customers ordering casters- if caster diameter is not specified 8"x 2" casters will be shipped. We also have available 6" x 2" and 4" x 2" diameter for customers who need to fit hoppers under conveyors or machines, etc.

Website

www.RouraMH.com for specification sheets, technical drawings, etc.

Foreign Orders

All orders shipped to foreign countries must either be prepaid, wire transfer, or credit card. We will ship to your export point from the U.S. (except Canadian orders) and will prepay and add that freight charge. The customer must furnish freight forwarding instructions with contact name and phone number. All fees are to be paid by customer: broker, bank, dock, etc., as well as any special or crating required for air or ocean travel.

Warranty

Roura Material Handling warrants that each hopper, and each component thereof, manufactured by Roura Material Handling. (the "Products") will be free from defects in material and workmanship for a period of twelve months from the date of shipment from its factory. Roura Material Handling will promptly repair or replace, at its option, Products that are found to be non-conforming according to the foregoing warranty with removal, transportation, and installation at your cost. Roura Material Handling. reserves the right to credit or reimburse you for an amount equal to the purchase price of any defective Product in lieu of providing repaired or replacement Product.

Roura Material Handling will have no liability or obligation for breach of warranty or otherwise for (a) Products, components and accessories which have been manufactured by someone other than Roura Material Handling, or (b) any Product which, following delivery by Roura Material Handling, has been subjected to accident, abuse, misapplication, improper repair or alteration, improper installation or maintenance, neglect, or excessive operation conditions.

In no event will Roura Material Handling be liable for any indirect, special, incidental or consequential damages regardless of whether or

not any of the same were foreseeable or that Roura Material Handling was advised as to the possibility of such damages. THE FOREGOING OBLIGATIONS ARE IN LIEU OF ALL OTHER OBLIGATIONS AND LIABILITIES INCLUDING ALL WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE OR OF MERCHANTABILITY OR OTHERWISE, EXPRESSED OR IMPLIED, IN FACT OR BY LAW.

You acknowledge and agree that this Warranty is incorporated in, and is a part of, each purchase order, release, requisition or other document relating to Products to be supplied by Roura Material Handling and that Roura Material Handling's acceptance of your offer to purchase is made conditional upon the acceptance of this Warranty. Any modification to this Warranty shall require the written consent of an authorized officer of Roura Material Handling.

Return Policy

If a customer receives our product and is unsatisfied due to a rare manufacturing defect, the product may be returned and will be replaced under warranty with Roura being responsible for the return freight charges.

If a customer receives our product and the customer changes their mind or discovers an error was made when they ordered the product, the product must be returned within 45 days of the invoice date, but will be subject to a 40% restocking fee and the customer will be responsible for any return freight charges. If the product contains any options the customer will be responsible for the full cost of all options. All product must be returned unused.

If a customer receives our product with damage or missing product from a carrier we set up, the customer must note this on the Delivery Receipt and Roura must be notified immediately to report the damage or missing product. We ask that the customer take digital photos of any damage if possible so that we may file a freight claim with the carrier.

All returns must be accompanied by a Roura Return Material Authorization (RMA) number and received at our facility within 30 days of the date of the issued RMA.

There will be no charge for cancellation of standard product providing the cancellation happens prior to the start of production. For all other cancellations, Roura reserves the right to charge the customer for costs incurred for labor and material.

ALL CUSTOM, BEHEMOTH, AND SPECIALTY PRODUCTS ARE NOT RETURNABLE.

PRODUCT WITH MHR SYSTEMS ARE NOT RETURNABLE AND OPTIONS ARE NOT RETURNABLE.

ROURA REQUIRES A SIGNED APPROVAL OF THE ENGINEER-ING DRAWING SENT WITH THE QUOTE FOR ALL CUSTOM PRODUCT BEFORE PRODUCTION WILL BEGIN.

Michigan:

35355 Forton Ct. Clinton Twp., Mi. 48035 Phone: 800-968-9070

Mississippi:

100 S. Industrial Park Rd. Holly Springs, MS 38635

Phone: 800-654-9147

